


Spacing Tables & Iso-Lux Plots



The data shown in these Tables is applicable to the NZ Market only. It indicates the maximum allowable horizontal spacings in metres between adjacent fittings in order to achieve 1 lux minimum illumination level along the Escape Route.

Data calculated using Industry Standard Software and Accredited Photometric Files for the individual products concerned.

		New Part Nos.	Old Part Nos.	Angle	Mounting Height								
					2.1	2.4	2.7	3.0	3.3	3.6	4.0	6.0	8.0
STARLITE	EMERGENCY	PSL10	EM5117SP	0°/90°	7.2	7.5	7.6	7.7	7.7	7.7	7.8	4.6	3.6
		PSL10-LH	EM5118SP	0°/90°	7.2	7.5	7.6	7.7	7.7	7.7	7.8	4.6	3.6
		PSL10-SMS/SMC	EM5119	0°/90°	7.2	7.5	7.6	7.7	7.7	7.7	7.8	4.6	3.6
		PSL10 Black	N/A	0°/90°	4.0	4.2	4.3	4.3	4.3	4.4	4.4	2.5	NR
		PSL10-WP IP65	EM5117WP	0°	6.6	6.8	7.2	7.2	7.2	7.2	5.2	3.0	NR
				90°	6.0	6.1	6.4	6.4	6.5	6.5	5.3	3.3	NR
StarLED	EMERGENCY	PLIFE		0°/90°	NR	10.4	10.6	10.8	11.0	11.2	11.4	11.0	9.4
		PLIFE SQ		0°/90°	NR	10.4	10.6	10.8	11.0	11.2	11.4	11.0	9.4
		PLIFE-SMS/SMC		0°/90°	NR	10.4	10.6	10.8	11.0	11.2	11.4	11.0	9.4
		PLIFE Black		0°/90°	NR	10.4	10.6	10.8	11.0	11.2	11.4	11.0	9.4
		PLIFE-WP IP65		0°									
				90°									
BOXLITE	EXITS	EBL10M-WM	EX5430	0°	7.5	7.5	7.4	7.4	7.3	7.0	6.1	5.4	4.6
				90°	4.9	4.9	4.9	4.9	4.7	4.6	3.7	3.3	2.3
		EBL10M-CM	EX5441	0°	8.0	8.4	8.6	8.8	9.0	9.2	9.4	9.2	NR
				90°	9.0	9.4	9.6	9.8	10.0	10.2	10.4	9.2	NR
		EBL210S-WM	EX5231	0°	5.2	4.9	4.4	3.6	7.3	7.0	6.1	5.4	4.6
		90°	2.4	1.9	2.0	1.9	4.7	4.6	3.7	3.3	2.3		
		0°	8.0	8.4	8.6	8.8	9.0	9.2	9.4	9.2	NR		
		90°	9.0	9.4	9.6	9.8	10.0	10.2	10.4	9.2	NR		
CLEVERFIT	EXITS	ECF8	EX5410	0°	5.0	4.9	4.6	4.2	3.6	2.7	NR	NR	NR
				90°	4.1	4.1	3.8	3.0	2.9	2.2	NR	NR	NR
		ECF28S	EX5210	0°	5.0	4.9	4.6	4.2	3.6	2.7	NR	NR	NR
				90°	4.1	4.1	3.8	3.0	2.9	2.2	NR	NR	NR
		PCF4	EX5415	0°	5.0	4.9	4.6	4.2	3.6	2.7	NR	NR	NR
		90°	4.1	4.1	3.8	3.0	2.9	2.2	NR	NR	NR		
		0°											
		90°											
BLADE	EXITS	PSB4	EX5000	0°	NR	NR	NR	NR	NR	NR	NR	NR	NR
				90°	NR	NR	NR	NR	NR	NR	NR	NR	NR
		PUB4	EX5900	0°	NR	NR	NR	NR	NR	NR	NR	NR	NR
		90°	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	




Spacing Tables & Iso-Lux Plots



The data shown in these Tables is applicable to the NZ Market only. It indicates the maximum allowable horizontal spacings in metres between adjacent fittings in order to achieve 1 lux minimum illumination level along the Escape Route.

Data calculated using Industry Standard Software and Accredited Photometric Files for the individual products concerned.

		New Part Nos.	Old Part Nos.	Angle	Mounting Height												
					2.1	2.4	2.7	3.0	3.3	3.6	4.0	6.0	8.0				
IP65 WEATHERPROOF	EXITS	PWE4	EX5424EWP	0°	1.6	1.6	1.0	0.8	NR	NR	NR	NR	NR				
				90°	4.2	4.4	4.0	3.6	NR	NR	NR	NR	NR				
	BATTENS	PWE24	N/A	N/A	0°												
					90°												
					PBS118-WP	EB5164WP	0°	6.2	6.2	6.8	7.0	7.2	7.6	7.6	7.0	2.0	
							90°	8.8	8.8	9.2	9.4	9.4	9.4	9.0	6.6	2.0	
					PBS218-WP	EB5264WP	N/A	0°									
								90°									
					PBS136-WP	EB5274WP	N/A	0°									
								90°									
PBS236-WP	EB5574WP	N/A	0°														
			90°														
BATTENS	BARE	PBS118	EB5260	0°	7.6	8.0	8.4	8.8	9.0	9.2	9.4	9.6	8.0				
				90°	10.6	11.0	11.4	11.6	12.0	12.0	12.2	12.0	9.8				
		PBS218	EB5560	N/A	0°												
					90°												
		PBS136	EB5270	N/A	0°												
					90°												
		PBS236	EB5570	N/A	0°												
					90°												
		BATTENS	WIRE GUARD	PBS118-WG	EB5263	0°											
						90°											
PBS218-WG	EB5563			N/A	0°												
					90°												
PBS136-WG	EB5273			N/A	0°												
					90°												
PBS236-WG	EB5573			N/A	0°												
					90°												
				180°													




Spacing Tables & Iso-Lux Plots



The data shown in these Tables is applicable to the NZ Market only. It indicates the maximum allowable horizontal spacings in metres between adjacent fittings in order to achieve 1 lux minimum illumination level along the Escape Route.


Data calculated using Industry Standard Software and Accredited Photometric Files for the individual products concerned.

	New Part Nos.	Old Part Nos.	Angle	Mounting Height										
				2.1	2.4	2.7	3.0	3.3	3.6	4.0	6.0	8.0		
BATTENS	DIFFUSER	PBS118-DIFF	EB5261	0°	6.8	7.2	7.6	8.0	8.4	8.6	9.0	10.0	9.0	
			EB5261	90°	9.8	10.0	10.2	2.5	10.6	10.8	11.0	11.6	11.4	
		PBS218-DIFF	EB5561	0°										
			EB5561	90°										
		PBS136-DIFF	EB5271	0°										
				90°										
	PBS236-DIFF	EB5571	0°											
			90°											
				180°										

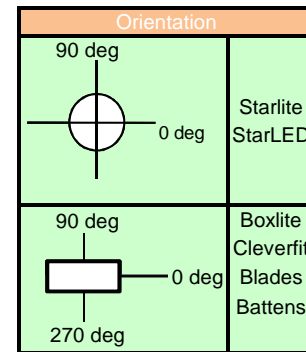

ISO-LUX PLOTS

PSL10 Series STARLITE 6V 10W Tungsten Halogen - White Reflector Plate

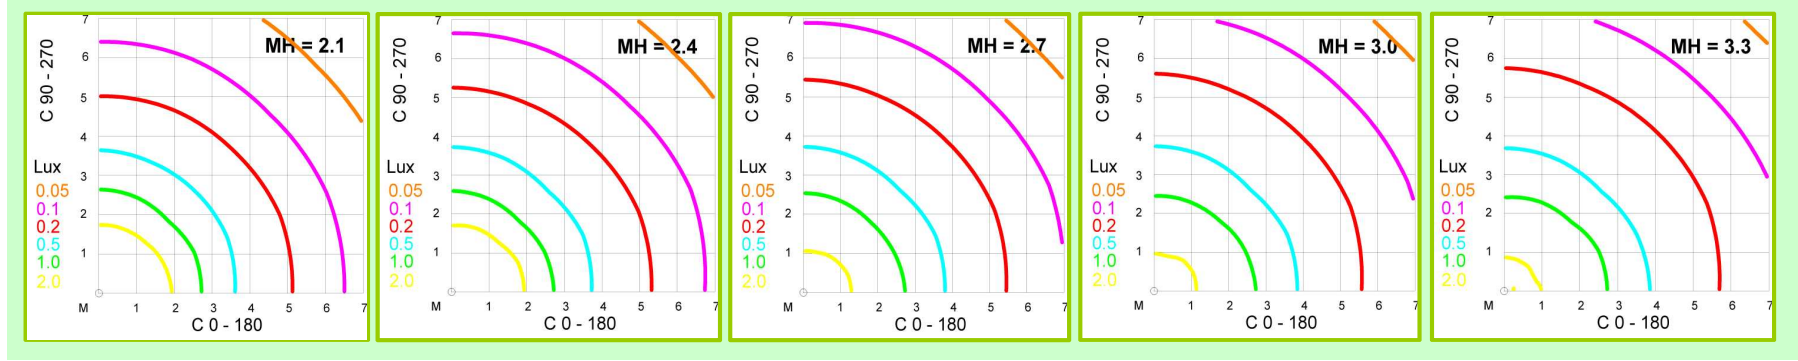

Spacing Tables & Iso-Lux Plots



The data shown in these Tables is applicable to the NZ Market only. It indicates the maximum allowable horizontal spacings in metres between adjacent fittings in order to achieve 1 lux minimum illumination level along the Escape Route.

Data calculated using Industry Standard Software and Accredited Photometric Files for the individual products concerned.

PLIFE Series StarLED 3W LED - All Colours, Styles & Shapes Except IP65 Version

